



LIGHT KIT INSTALLATION INSTRUCTIONS CLUB CAR PRECEDENT

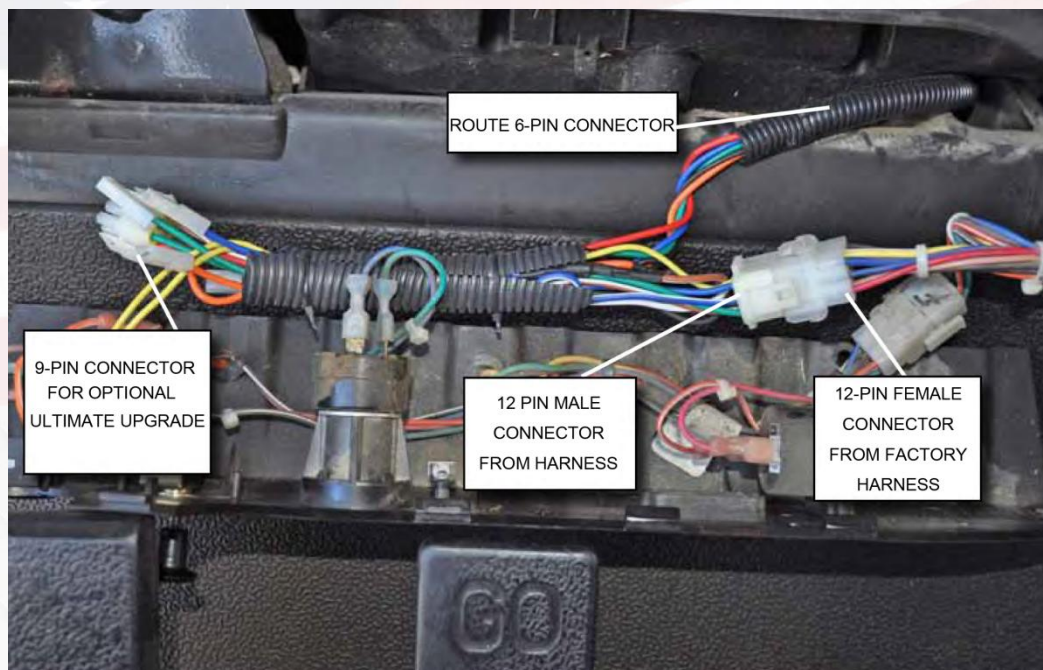

1. Remove the three torx head screws that secure the instrument panel and remove the panel from the dash.
2. Locate the indentation to the right of the key switch on the instrument panel and drill a 7/16" hole for the push pull headlight switch.
3. Remove the knob, retaining nut and washer from the push pull head light switch. Insert the shaft of the switch into the hole and the instrument panel and secure using the washer and the nut. Reattach the knob.
4. Plug the 12-Pin male Precedent light harness connector into the 12-PIN female connector on the main vehicle harness and wire tie to existing instrument panel control harness.
5. Route the 6-PIN connector through the cutout in the passenger dash.
6. Reinstall the instrument panel. CAUTION: DO NOT PICH ANY WIRING.
7. Remove the front bumper. Retain hardware. You will need it to install the new headlight bumper assembly.
8. Plug the 6-PIN male wire harness connector into the 6-PIN female headlight wire harness connector and wire tie harness to frame support (the two extra wires on this harness are for use with the optional horn kit.)
9. Install the headlight bumper assembly using retained hardware from Step 7.


LIGHT KIT INSTALLATION INSTRUCTIONS CLUB CAR PRECEDENT

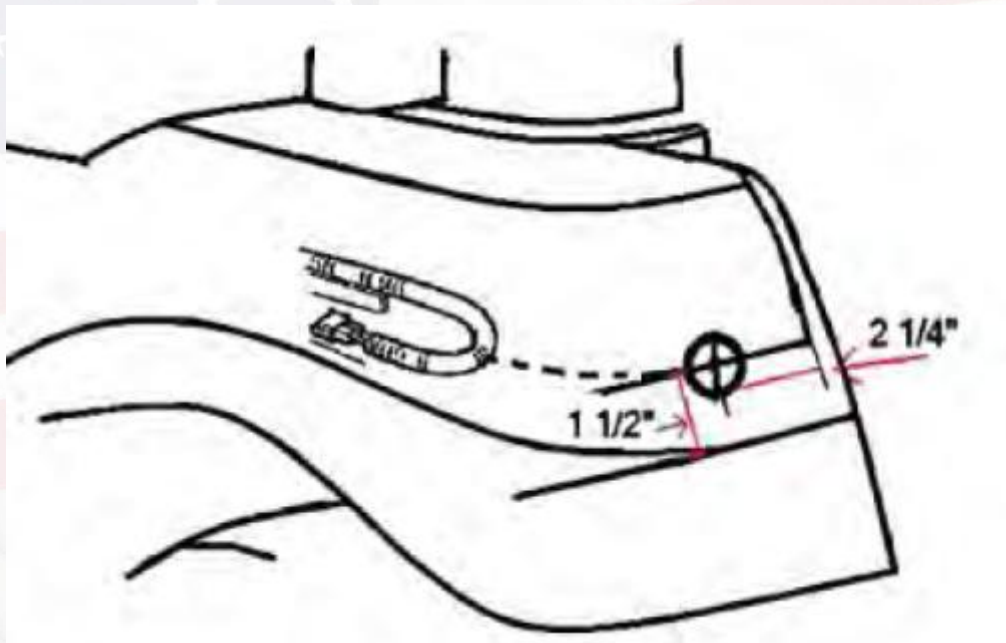

Before removing double sided tape and installing the LED tail lights, test fit them in their position on the rear location of the vehicle.

1. Mark the center of the taillight hole as indicated by above drawing. Use a 1-1/2" hole saw to drill a hole in the location as shown in above drawing. Sand to remove sharp edges.
2. Position the tail lights as shown in the above photo. The flat ends of the tail lights should be where the sharper curve of the body from the bag well begins a more gradual curve. If there is a gap between the tail light and the body, reposition until there is no gap.
3. Thoroughly clean the surface area where tail lights will be mounted. Important: Surface must be free of any dirt, wax, or products that will inhibit double sided tape from adhering properly.
4. Reach inside the hole and pull the tail light connector through the hole into the rear body.
5. Connect the tail lights to the vehicle tail light wiring harness.
6. Determine the desired location of the tail lights. Remove the double sided tape from the back of the tail light and mount to the rear body.

LIGHT KIT INSTALLATION INSTRUCTIONS CLUB CAR PRECEDENT

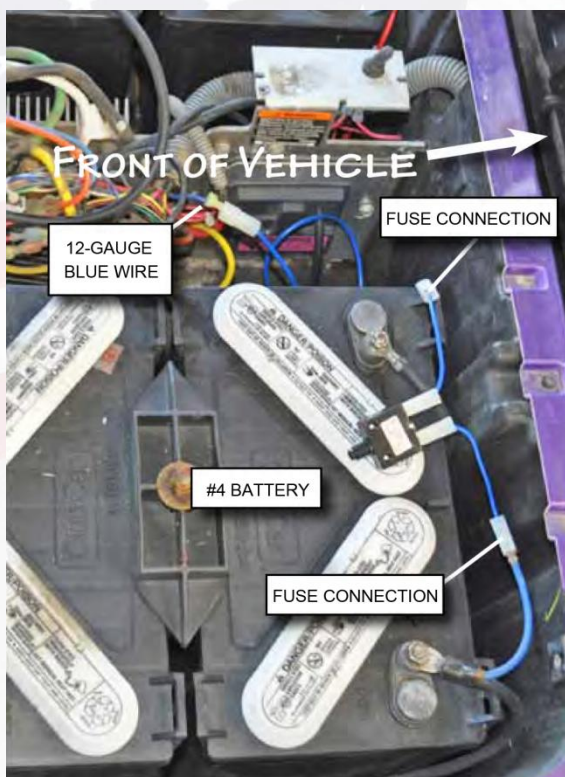

Follow the instructions supplied with your converter then hook the blue wire with inline circuit breaker to the 12v+output on your converter.

Use a multi-meter to test voltage output before you hook up blue wire or bulb failure may occur.

FOR VEHICLES WITH 48 to 12 DC CONVERTER

Fuse Assembly Installation

1. Remove the seat bottom and the electronic component cover located between the batteries.
2. Locate the blue wire leading from the #4 battery positive connection and connect to the long lead of the fuse assembly.
3. Locate the single 12-Gauge blue wire with a spade terminal leading from the passenger side of the electronic component area and connect the short lead leading from the fuse assembly.
4. Secure all loose wires.
5. Replace the electronic component cover and test the lights.

OPTIONAL 48 VOLT INSTALLATION (FOR CARTS WITH DC TO DC CONVERTER)

1. Separate the voltage reducer disconnects in the light wire harness and install a 10 or 25 amp voltage reducer in the circuit. Mount the voltage reducer in the dash area or another area of your choice.
2. Remove the seat bottom and the electronic component cover located between the batteries from the cart.
3. Locate the blue wire leading from the #1 battery positive connection and connect to the long lead of the fuse assembly.
4. Locate the single 12 gauge blue wire with a spade terminal coming from the passenger side of the electronic component area and connect the short lead coming from the fuse assembly.
5. Secure all loose wires.
6. Install electronic component cover and test the lights.



RETURN MERCHANDISE AUTHORIZATION

Dear Valued Customer,

Thank you for choosing Steeleng Golf Cart Accessories for your golf cart needs.

We apologize for the issues you are having with your purchase. We strive to offer the absolute best quality at the absolute best price.

To best serve you, we do need a little information to help process your return and/or exchange faster.

Please complete the following and include this entire form with your return.

Name

Shipped To Address STATE ZIP

Purchased with: eBay Direct Phone Order

This is for EXCHANGE REFUND

Please describe reason for return:-

Our Return Address:
Steeleng Golf Cart Accessories
3309 Laurens Road,
Greenville, SC 29607
Tele: 864-675-1103

For Office Use Only:

Received By: _____ Date _____
Refund Amount _____ Exchange Issued _____

**Steeleng Golf Cart Accessories reserves the right to charge a 15% restocking fee for all returned and/or exchanged items.