


LIGHT KIT INSTALLATION INSTRUCTIONS


TXT FREEDOM



STEELNG recommends professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.

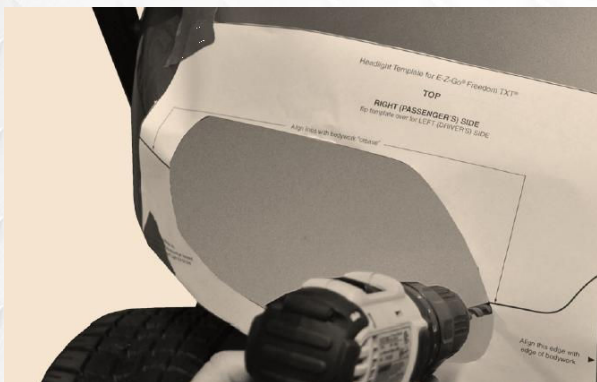

1. Place template on front of the cart. Be sure to use alignment references for proper placement. Tape along the ridges in the cowl. Mark along the inside with a marking pen. Drill pilot hole on the inside of the template line. Cut out the shape of the headlight. Use the cutting tool to remove the excess trim. *Flip template over repeat process on the other side.

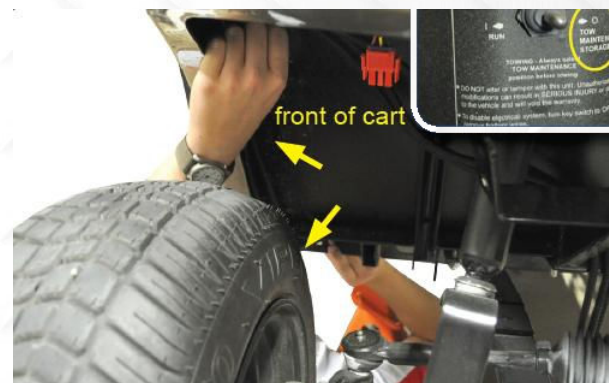

2. Use sandpaper to smooth out any rough edges. Mount headlight through the cutout. Push top half in first as shown.

3. *Make sure cart is in TOW mode. Lift front of the cart and place jack stands to support. Feed front harness down through the front of the battery compartment. Run long tail light wire under the seat and over the tire well on the passenger's side. Run short tail light wire under the seat and over the tire well on the driver's side. **Red plugs should be aligned to passenger side, white plugs for driver's side.**

LIGHT KIT INSTALLATION INSTRUCTIONS

TXT FREEDOM



4. Align Tail Light template to the body contour as shown. Be sure to use alignment references for proper placement. Use a marking pen to trace the inside line. *Flip template over to use on other side. Next drill a pilot hole so you will have a starting point and then begin cutting. *Use sandpaper to smooth edge.



5. Feed the tail light harness through the back of the cart. Attach rear tail light wire harness as shown. Secure wire with ties.



6. Place tail light into the rear of the vehicle. Insert four self tapping screws into tail light using supplied hardware. *Repeat process on other side.




7. Remove the push/pull switch from harness. Run the wire harness through the holes under the frame to secure the harness. Use the zip ties provided. Attach headlight to wire harness as shown. Secure excess wire with zip ties.



8. Using a phillips head screw driver, remove the 5 screws on the dash board and retain hardware.

LIGHT KIT INSTALLATION INSTRUCTIONS TXT FREEDOM

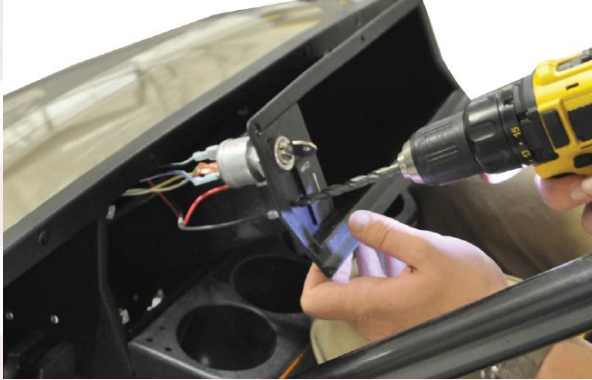


9. Using a 7/16 drill bit, drill out the hole for the Push/Pull switch. Drill gently.



10. Feed the Push/Pull switch wire through the dashboard.



11. Reattach Push/Pull switch to harness. Remove small washer and retain. Feed threaded end of switch through the dash where the hole was drilled.

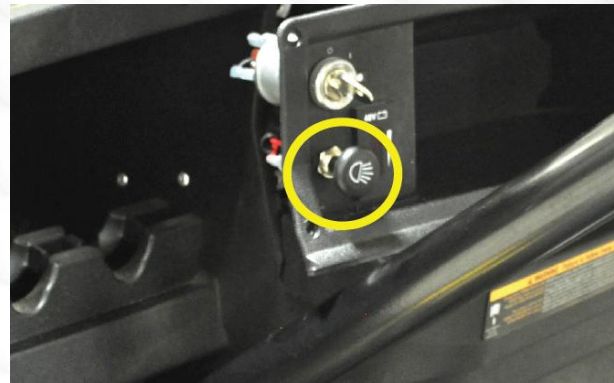

12. Attach the nut to tighten the switch. Reattach Push/Pull knob. Using retained hardware to reattach dashboard.



RETURN MERCHANDISE AUTHORIZATION

Dear Valued Customer,

Thank you for choosing Steeleng Golf Cart Accessories for your golf cart needs.

We apologize for the issues you are having with your purchase. We strive to offer the absolute best quality at the absolute best price.

To best serve you, we do need a little information to help process your return and/or exchange faster.

Please complete the following and include this entire form with your return.

Name

Shipped To Address

STATE

ZIP

Purchased with: eBay Direct Phone Order

This is for EXCHANGE REFUND

Please describe reason for return:-

Our Return Address:
Steeleng Golf Cart Accessories
3309 Laurens Road,
Greenville, SC 29607
Tele: 864-675-1103

For Office Use Only:
Received By: _____ Date _____
Refund Amount _____ Exchange Issued _____

**Steeleng Golf Cart Accessories reserves the right to charge a 15% restocking fee for all returned and/or exchanged items.